


Motion Detection Setup


All SureVision NVR systems are configured to record 24/7 right out of the box! You do not need to change anything here if you plan on recording 24 hours a day, 7 days a week. If you would like to configure your system to record only on Motion please follow this guide.

To check or alter your recording settings please right click on the main screen and navigate to the Menu-> Storage -> Recording. This example shows a system set to record 24/7.

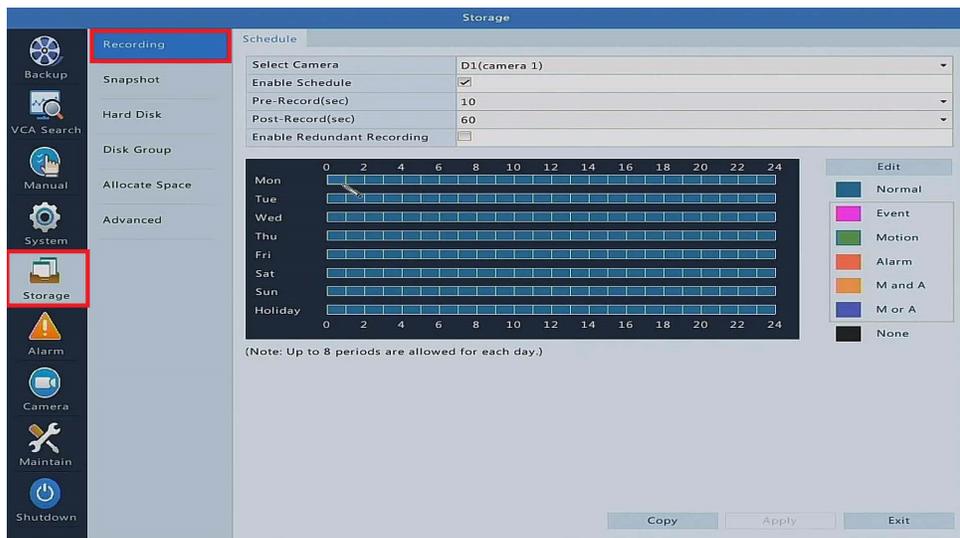

The NVR can also be configured to Motion Detection, which is a popular function. This will conserve hard drive space and make it easier to search for events in the future. Motion detection can be configured differently for each camera and each day if you choose (continue to the next section if you prefer to set up motion detection). If you plan to keep your system recording 24/7 you do not need to go any further.

While inside of the Recording setting (Menu-> Storage-> Recording) Click the green box on the right hand column next to Motion. Click and hold the click down, drag the mouse cursor on the schedule when you would like motion recording. Apply any changes after they have been made.

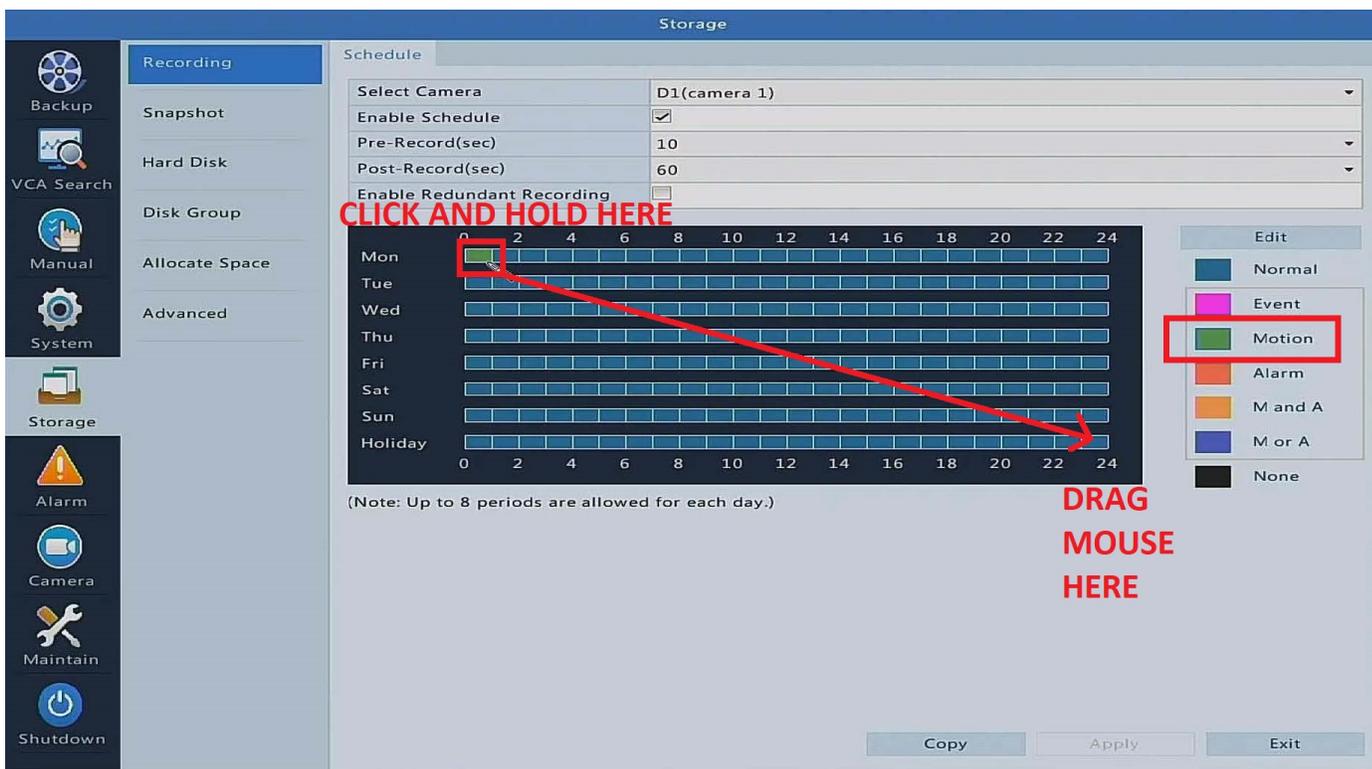


If the above steps were correctly followed your schedule should look like this below . This is an example of 24/7 motion detection. Please note that you can select one block at a time by clicking on them.



Now that your schedule is set you will most likely want to copy the settings you just configured to each camera.

You can do this by clicking the **Copy** button at the bottom of the menu and selecting which cameras you would like to copy to.

Click OK when done.

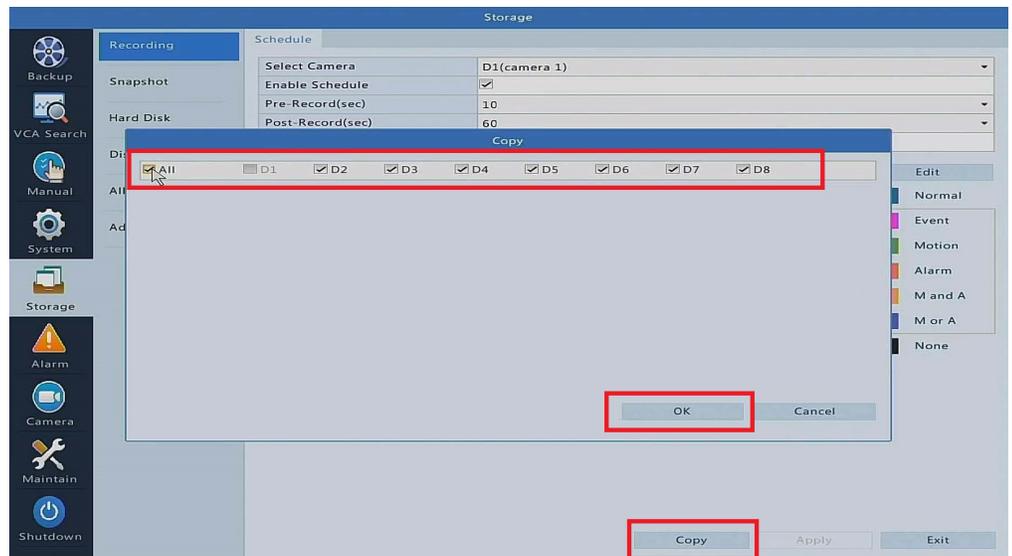

Dont forget to **Apply** your changes when you're all done.

